Arké: Frame 2M without screws 71mm

19603

Arké / Mounting frames / For square boxes

Frame 2M without screws 71mm

2-module mounting frame, without screws, for 60 mm fixing centres or 56x56 mm mounting box, modular, 71 mm distance between centres, for horizontal or vertical installation

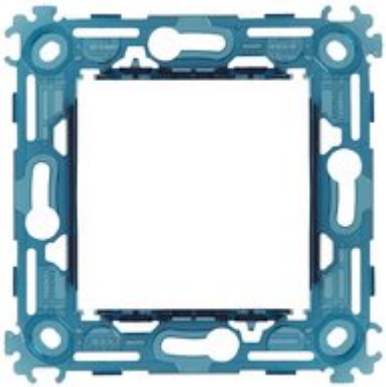

- The transparency helps the installation and the wiring of devices
- The honeycomb structure gives structural strength
- The slots in the corners enable fixing to the panel
- The hooking teeth encourage fixing in series for the installation of multiple modules
- Thanks to the central slots, the support can be fixed onto the wall level

Stato prodotto

3 - Active

Q.tà minima ordine

50 NR

Potrebbe interessarti anche

14602.C - Frame protection 2M Plana/Arké

Video

- Arké lives in your time

Dis

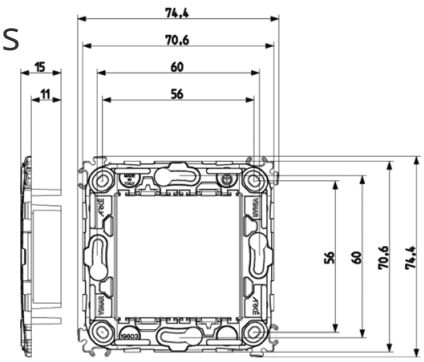

Vista ingombri

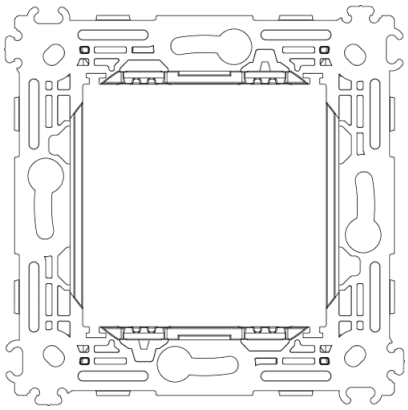

Vista posteriore

Vista 3D

Gallery

Dati tecnici

- **Class group**: Domestic switching devices
- **Class**: Holder for modular domestic switching devices
- **Model**: Flush mounted (plaster)
- **Mounting method**: Mounting with screw
- **Mounting method of the module inserts**: Front side
- **Mounting direction**: Horizontal and vertical
- **Number of modules horizontal (module system)**: 2
- **Number of modules vertical (module system)**: 1
- **With built-in installation box**: No
- **With screws**: No
- **Suitable for mounting in round junction box 60 mm**: No
- **Flush-mounted installation**: Yes
- **Suitable for floor box**: No
- **Suitable for wall duct**: No
- **Suitable for mounting on DIN-rail 35 mm**: No
- **Material**: Plastic
- **Material quality**: Thermoplastic

Marchi

- 00. CE Marking - EU
- 01. IMQ - Italy (download)
- 15. CCC - China (download)
- 29. QCERT - Colombia (download)
- 37. Marking - Morocco
- 96. Electrotechnical expert (download)

Imballi

Codice	8007352433489
Qtà	1 NR
Dim.	7.4x7.4x2.5 [cm]
Peso	10.6 [g]

Codice	8007352433496
Qtà	50 NR
Dim.	28.6x24.8x9.6 [cm]
Peso	655.6 [g]



Codice	8007352626003
Qtà	300 NR
Dim.	62x26x30 [cm]
Peso	4,383 [g]

Legal

Vimar si riserva il diritto di modificare in ogni momento e senza preavviso le caratteristiche dei prodotti riportati.L'installazione deve essere effettuata da personale qualificato con l'osservanza delle disposizioni regolanti l'installazione del materiale elettrico in vigore nel paese dove i prodotti sono installati.Per le condizioni di utilizzo delle informazioni presenti sulla scheda prodotto vedere Conditions of Use.