


2L3B00

Electric Strike

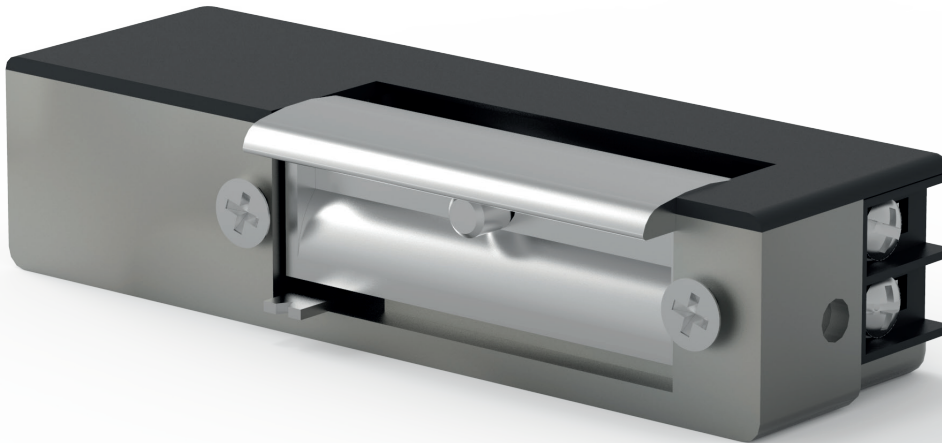

Specifications

Hold open with mechanical unlocking, fixed keeper, and nylon cover

Voltage 6-14V AC/DC Continuous duty < 1min

Break-in resistance 3.500 N

Tested cycles without side-load 200.000 cycles

Working in temperature range: -25°C to +70°C

DIN left doors

Type of Contact: Pulse and continuous contact

Box: DIN L

Height (mm): 90 mm

Width (mm): 21 mm

Depth (mm): 28 mm

Voltage: 6-14V AC/DC

Installation position: Vertical

Model: Hold open with mechanical unlocking

Monitoring: No

Suitable for fire protection: No
