Plana: Frame 2centralM +screws

14612

Plana / Mounting frames / For rectangular boxes

Frame 2centralM +screws

2-central-module mounting frame, with screws, for 3-module mounting boxes or boxes with 60 mm fixing centres or 56x56 mm, for horizontal or vertical installation

- The transparency helps the installation and the wiring of devices
- The honeycomb structure gives structural strength
- The slots in the corners enable fixing to the panel
- The hooking teeth encourage fixing in series for the installation of multiple modules
- Thanks to the central slots, the support can be fixed onto the wall level

Stato prodotto

3 - Active

Q.tà minima ordine

20 NR

Potrebbe interessarti anche

VIMAR

-

07937 - Screw for frame fixing - 35mm

07939 - Screw for frame fixing - 50 mm

Dis

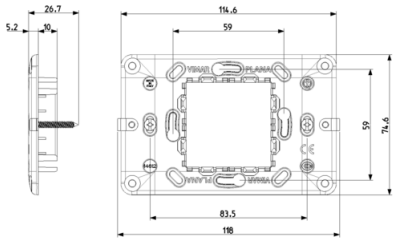

Vista ingombri

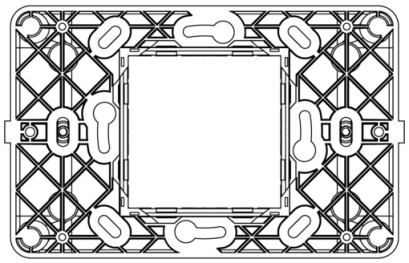

Vista posteriore

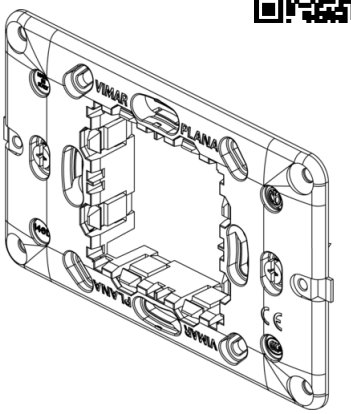

Vista 3D

Gallery

Dati tecnici

- **Class group**: Domestic switching devices
- **Class**: Holder for modular domestic switching devices
- **Model**: Flush mounted (plaster)
- **Mounting method**: Mounting with screw
- **Mounting method of the module inserts**: Front side
- **Mounting direction**: Horizontal and vertical
- **Number of modules horizontal (module system)**: 2
- **Number of modules vertical (module system)**: 1
- **With built-in installation box**: No
- **With screws**: Yes
- **Suitable for mounting in round junction box 60 mm**: No
- **Flush-mounted installation**: Yes
- **Suitable for floor box**: No
- **Suitable for wall duct**: No
- **Suitable for mounting on DIN-rail 35 mm**: No
- **Material**: Plastic
- **Material quality**: Thermoplastic

Marchi

- 00. CE Marking - EU
- 01. IMQ - Italy (download)
- 15. CCC - China (download)
- 29. QCERT - Colombia (download)
- 37. Marking - Morocco
- 96. Electrotechnical expert (download)

Imballi

Codice	8007352122581
Qtà	1 NR
Dim.	8.35x6x1.5 [cm]
Peso	25.89 [g]

Codice	8007352122598
Qtà	20 NR
Dim.	24.4x13.9x11.9 [cm]
Peso	614.87 [g]



Codice	8007352368880
Qtà	240 NR
Dim.	59.5x38.5x26.5 [cm]
Peso	8,178.44 [g]

Legal

Vimar si riserva il diritto di modificare in ogni momento e senza preavviso le caratteristiche dei prodotti riportati.L'installazione deve essere effettuata da personale qualificato con l'osservanza delle disposizioni regolanti l'installazione del materiale elettrico in vigore nel paese dove i prodotti sono installati.Per le condizioni di utilizzo delle informazioni presenti sulla scheda prodotto vedere Conditions of Use.